arXiv:1610.00218v1 [physics.plasm-ph] 2 Oct 2016

Simon-Hoh, lower-hybrid and ion-sound instabilities in partially magnetized plasmas of $\mathbf{E} \times \mathbf{B}$ discharges: Numerical studies with MATLAB solver.

Ivan Romadanov,[1, a)] Andrei Smolyakov,[1, b)] Winston Frias,[1, c)] Oleksandr Chapurin,[1, d)] and Oleksandr Koshkarov[1, e)]

[1] *Department of Physics and Engineering Physics, University of Saskatchewan, Saskatoon SK S7N 5E2, Canada*

MATLAB solver has been developed for studies of local instabilities in partially magnetized plasmas typical for $\mathbf{E} \times \mathbf{B}$ discharge plasmas. Examples for the Simon-Hoh, lower-hybrid and ion-sound instabilities in Penning discharge. The detailed behavior of the local dispersion relation can be investigated, plotted and saved with this solver. It allows to include various effects, change plasma parameters and obtain eigen-frequencies as a function of the wavenumbers in x or y directions.

[a)] Electronic mail: ivr509@mail.usask.ca

[b)] Electronic mail: andrei.smolyakov@usask.ca

[c)] Electronic mail: winston.frias@usask.ca

[d)] Electronic mail: alex.chapurin@usask.ca

[e)] Electronic mail: olk548@usask.ca

I. EXAMPLES OF INSTABILITIES FROM GENERAL DISPERSION RELATION

Matlab solver "Hall Plasmas Discharge Solver" was developed to investigate local instabilities in partially magnetized plasmas typical for $\mathbf{E} \times \mathbf{B}$ discharge plasmas such as in Hall thruster, Penning discharges and magnetrons. Here examples for the Simon-Hoh, lower-hybrid and ion- sound instabilities are presented. Electron inertia, gyroviscosity, and ion flow are included into the general local dispersion equations. Detailed explanations of the physics models, equations and notations are given in the companion paper Ref. 1. The source code and executable installer can be downloaded at[3]. Current version of the installer can be used on the MS Windows computers and does not require the installed MATLAB. Typical parameters of the Penning discharge device[2] are presented in Table I.

Table I: Typical Penning discharge parameters

Parameter	Value
T_e	10 eV
B	50 G
E	50 V/m
n	10^{18} m^{-3}
L_n	-0.06 m^2
c_s	$2.7 \cdot 10^3$ m/s
v_*	$3.4 \cdot 10^4$ m/s
v_0	$1 \cdot 10^4$ m/s
v_i	$2.1 \cdot 10^4$ m/s
ω_{LH}	$1.8 \cdot 10^6$ rad/s
ω_{ce}	$8.8 \cdot 10^8$ rad/s
ω_{pe}	$5.6 \cdot 10^{10}$ rad/s
ρ_e	$1.5 \cdot 10^{-3}$ m
ν_e	10^6 rad/s

where T_e- electron temperature, $B-$ magnetic field, $n-$ density, $E-$ electric field, L_n- density gradient length, c_s- ion sound velocity, v_s- diamagnetic drift velocity, $v_0- \mathbf{E} \times \mathbf{B}$

velocity, ν_e - electron neutral collision frequency, $\omega_{LH}-$ lower hybrid frequency, ρ_e- electron gyroradius.

A. Simon-Hoh instability

The standard collisionless Simon-Hoh dispersion relation is given

$$\frac{\omega_*}{\omega - \omega_0} = \frac{k_\perp^2 c_s^2}{\omega^2} \tag{1}$$

Typical results are presented in Fig. 1, as functions of $k_y\rho_e$ (left) and $k_x\rho_e$ (right) respectively.

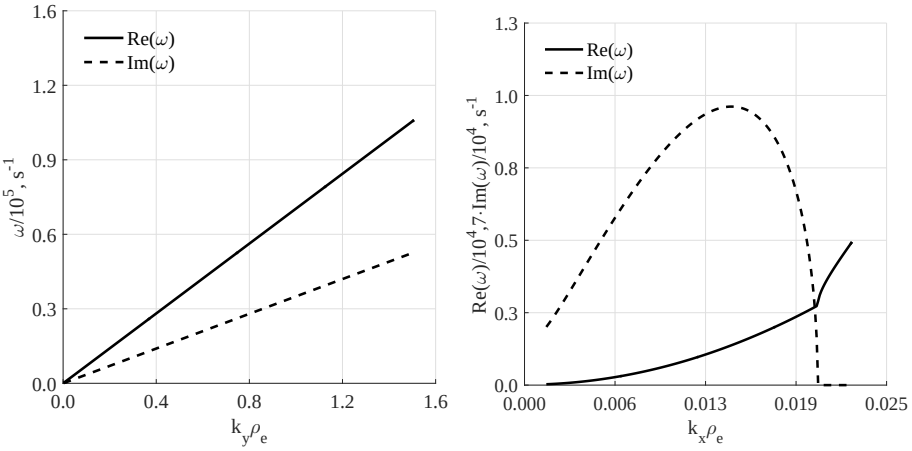

Figure 1: Frequency and growth rate of the Simon-Hoh instability as a function of $k_y\rho_e$ at $k_x = 1$ (left) and $k_x\rho_e$ at $k_y = 1$ (right).

Solver interface with parameters, which were used to calculate data for Fig. 1, is shown in Fig. 2. As it is seen, interface allows to control the form of the equation, what makes it more convenient.

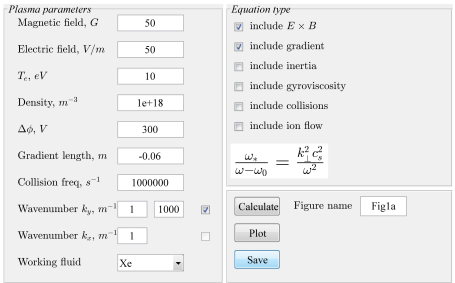

Figure 2: View of the solver interface with parameters, which were used to obtain Fig 1.

B. Effect of electron inertia on Simon-Hoh instability

As was noted in[1], Simon-Hoh instability is, in fact, can have high frequency comparable to ω_{LH} even for low k_y. Therefore, electron inertia effect become important and should be included. Corresponding dispersion relation is given in Eq. 2

$$\frac{\omega_* + k_\perp^2 \rho_e^2 (\omega - \omega_0)}{\omega - \omega_0} = \frac{k_\perp^2 c_s^2}{\omega^2}. \tag{2}$$

Typical mode behaviour is shown in Fig. 3. Electron inertia results in the cut-off for the instability at high k_y values, while dependence on k_x remains approximately the same. Note that the eigen-mode frequencies become lower, compared to the Simon-Hoh case.

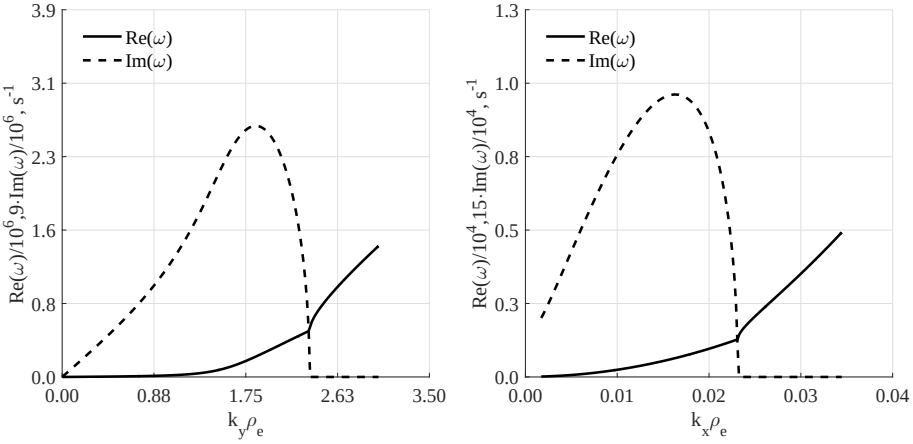

Figure 3: Frequency and growth rate of the Simon-Hoh instability with electron inertia effect as a function of $k_y\rho_e$ at $k_x = 1$ (left) and $k_x\rho_e$ at $k_y = 1$ (right).

Solver interface with parameters, which were used to calculate data for Fig. 3, is shown in Fig. 4.

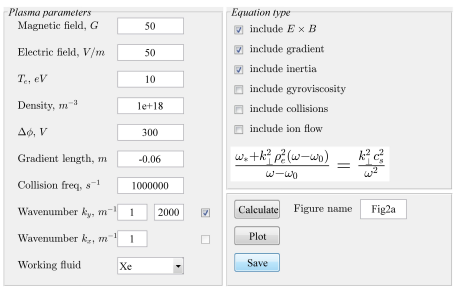

Figure 4: View of the solver interface with parameters, which were used to obtain Fig 3.

C. Effects of electron inertia and gyroviscosity on Simon-Hoh modes

In general, modes with high $k_\perp \rho_e \gg 1$ values should be considered with kinetic theory, due to importance of finite Larmor radius effect at such regimes. However, this effect can be incorporated into fluid consideration via the electron gyroviscosity[1]. Modified equation is shown below

$$\frac{\omega_* + k_\perp^2 \rho_e^2 (\omega - \omega_0)}{\omega - \omega_0 + k_\perp^2 \rho_e^2 (\omega - \omega_0)} = \frac{k_\perp^2 c_s^2}{\omega^2}. \tag{3}$$

As is seen in Fig. 5, gyroviscosity effect extends instability to higher $k_y \rho_e$ values and leads to the increase of the most unstable frequency with k_x.

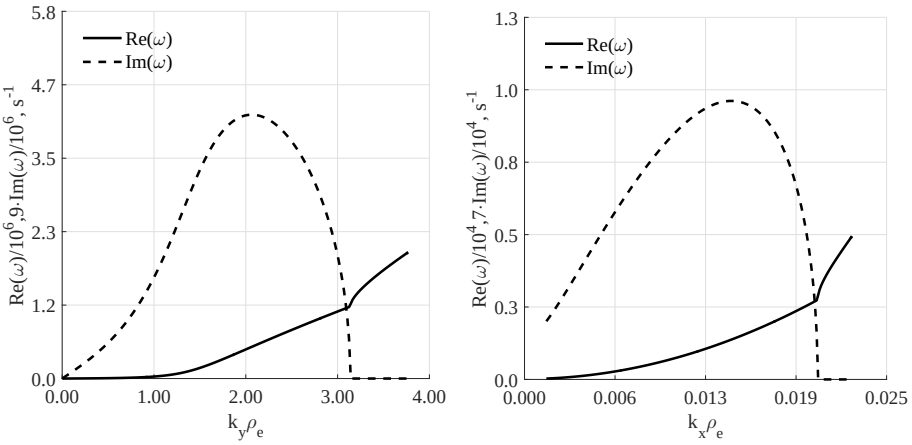

Figure 5: Frequency and growth rate of the Simon-Hoh instability with electron inertia and gyroviscosity effects as a function of $k_y \rho_e$ at $k_x = 1$ (left) and $k_x \rho_e$ at $k_y = 1$ (right).

Solver interface with parameters, which were used to calculate data for Fig. 5, is shown in Fig. 6.

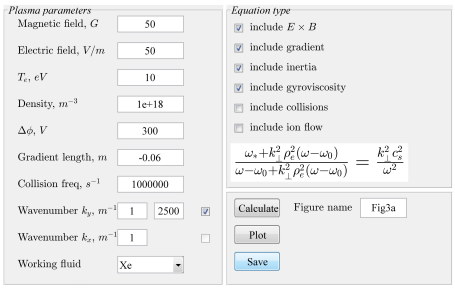

Figure 6: View of the solver interface with parameters, which were used to obtain Fig 5.

D. Full dispersion relation including effects of electron inertia, gyroviscosity, $\mathbf{E}\times\mathbf{B}$ flow, and collisions

In systems with flows as typical for Hall discharge devices, there are exist modes with negative energy which become unstable due to the dissipation effects and collisions have been considered as an additional destabilization mechanism. The dispersion relation with effects of collisions has the form

$$\frac{\omega_* + k_\perp^2\rho_e^2(\omega-\omega_0+i\nu_e)}{\omega-\omega_0+k_\perp^2\rho_e^2(\omega-\omega_0+i\nu_e)} = \frac{k_\perp^2 c_s^2}{\omega^2}. \tag{4}$$

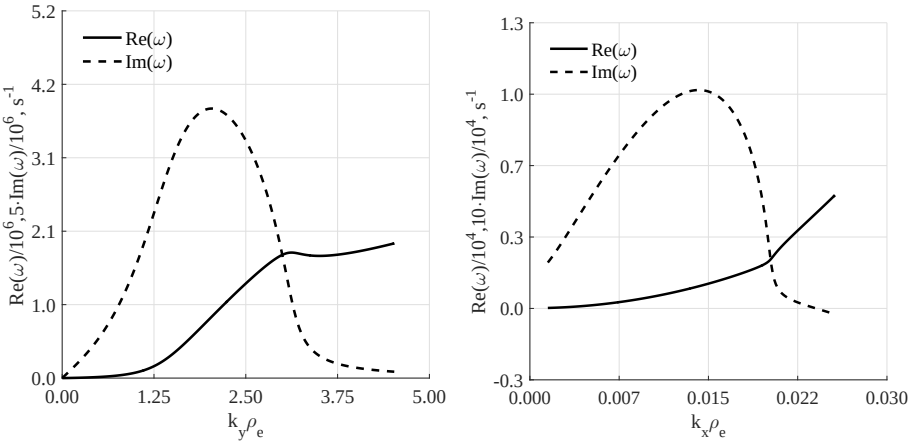

Figure 7: Frequency and growth rate for the full dispersion relation as a function of $k_y\rho_e$ at $k_x = 1$ (left) and $k_x\rho_e$ at $k_y = 1$(right).

Solver interface with parameters, which were used to calculate data for Fig. 7, is shown in Fig. 8.

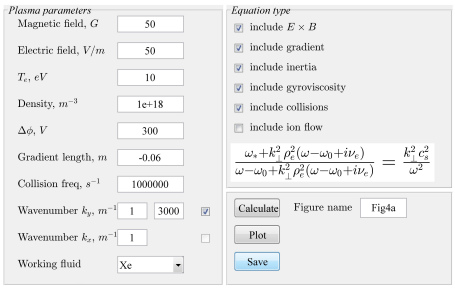

Figure 8: View of the solver interface with parameters, which were used to obtain Fig 7.

E. Effects of electron inertia, gyroviscosity, and collisions on Simon-Hoh modes without $\mathbf{E} \times \mathbf{B}$ flow

The electron $\mathbf{E} \times \mathbf{B}$ drift is an important source of free energy for Hall $\mathbf{E} \times \mathbf{B}$ discharge plasmas. However, even in absence of the electron drift, but in presence of the density gradients, the system is still in non-equilibrium state and can be prone to dissipative instabilities. In this case, the relevant dispersion equation is

$$\frac{\omega_* + k_\perp^2 \rho_e^2 (\omega + i\nu_e)}{\omega + k_\perp^2 \rho_e^2 (\omega + i\nu_e)} = \frac{k_\perp^2 c_s^2}{\omega^2}. \tag{5}$$

The growth rate and real frequency for this case is shown in Fig. 9.

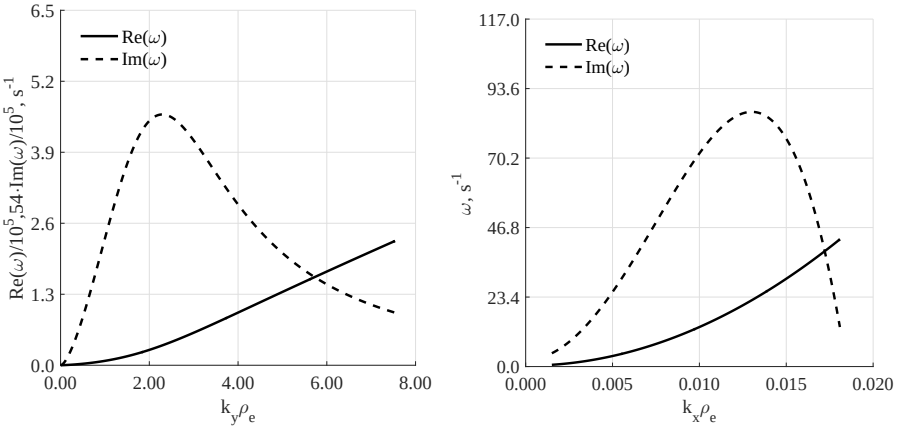

Figure 9: Frequency and growth rate of the Simon-Hoh instability with electron inertia, gyroviscosity, and collisions effects without $E \times B$ flow as a function of $k_y \rho_e$ at $k_x = 1$ (left) and $k_x \rho_e$ at $k_y = 1$ (right).

Solver interface with parameters, which were used to calculate data for Fig. 9, is shown in Fig. 10.

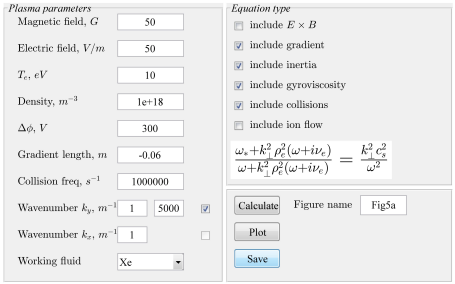

Figure 10: View of the solver interface with parameters, which were used to obtain Fig 9.

F. Destabilization of Simon-Hoh modes with ion flow

This example is related to the case in Ref. 1 in section 2.2. Ion flow in x direction can serve as an additional mechanism for the destabilization of the Simon-Hoh modes. Corresponding dispersion relation is given below

$$\frac{\omega_*}{\omega - \omega_0} = \frac{k_\perp^2 c_s^2}{(\omega - \omega_{0i})^2}. \tag{6}$$

The growth rate and real frequency for this case is shown in Fig. 11.

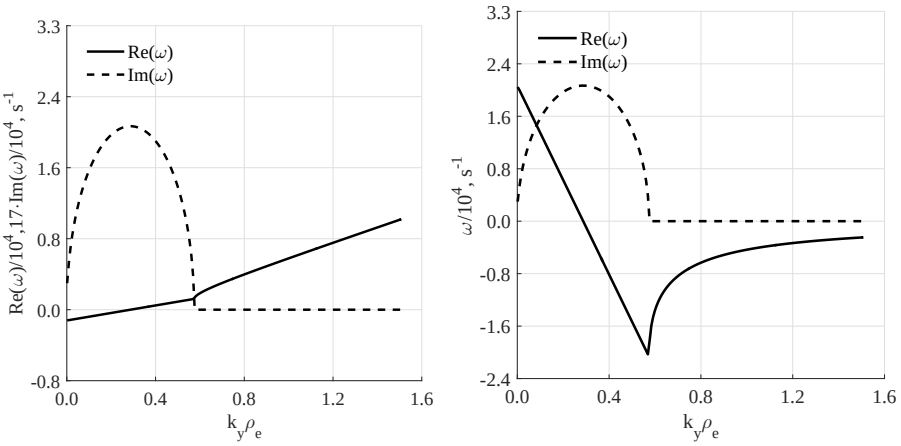

Figure 11: Frequency and growth rate of the Simon-Hoh instability with ion flow as a function of $k_y\rho_e$. With ion flow in negative $k_x = -1\ m^{-1}$ (left) and positive $k_x = 1\ m^{-1}$ (right) directions. Ion velocity $v_{0i} = 2 \cdot 10^4\ m/s$; gradient length $L_n = -0.06\ m$.

Solver interface with parameters, which were used to calculate data for Fig. 9, is shown in Fig. 12.

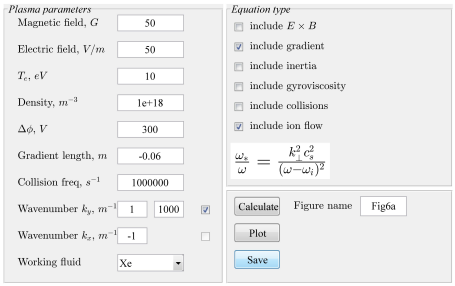

Figure 12: View of the solver interface with parameters, which were used to obtain Fig 11.

II. MATLAB SOLVER

Unmagnetized $\mathbf{E} \times \mathbf{B}$ discharge plasmas solver can be conveniently used to study parametric dependence of local instabilities. General view of the software interface is shown in Fig. 13. It consists of three main fields: 1 – plasma parameters; 2 – define the include effects and displays the solved equation; 3–calculations, plotting and saving functions.

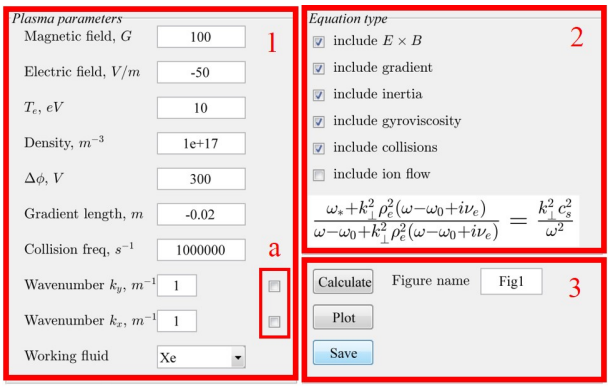

Figure 13: General view of the software interface. Section 1 – plasma parameters control; section 2 – form of the equation control; section 3 – plotting and saving control; checkboxes (a) – wavenumbers control.

All parameters and their dimensionality are defined in Field 1. Regular or scientific notation can be used for input values. There are only two types of gases for now: xenon and argon. Electric potential is for the ion acceleration in the x direction; this value is used only if the ion flow effect is included. There is a check on empty or non-numeric fields; however, there are no limitations on input numbers.

The solver tool calculates the dependency of growth rate and frequency as a function of the wave numbers k_y or k_x. Checkboxes control along which axis the eigenfrequency will be plotted. Once, one of the checkboxes is checked, the second checkbox becomes disabled; however, the fixed value of the second wavenumber can be changed. Additional field appears, which is used to indicate the range of the wavenumbers. See Fig. 14 for detailed view. Calculations will be done for the given range of wavenumbers in one direction and fixed value of the wavenumber in another direction.



Figure 14: Wavenumbers control checkbox.

Field 2 allows the user to change the included effects and solved equations. The corresponding equation will be shown at the bottom of the Field 2. Field 3 is a control section. To perform calculations, the Calculation button should be pressed. Plot button will plot the results. After the results are plotted, they can be saved by Save button. Note, that window with plotted results should remain open, so it can be saved. Figure name field is for the name of the output files. There are two output files: structure with all variables, and eps format figure.

REFERENCES

[1]A. Smolyakov, O. Chapurin. W. Frias, O. Koshkarov, I. Romadanov, T. Tang, M. Umansky, Y. Raitses, I. Kaganovich, V. Lakhin, Plasma Physics and Controlled Fusion, under review (2016).

[2]Y. Raitses, I. Kaganovich, and A. Smolyakov, "Effects of the gas pressure on low frequency oscillations in ExB discharges," in Proceedings of Joint Conference of 30th ISTS, 34th IEPC and 6th NSAT, IEPC-2015-307.

[3]`https://bitbucket.org/ivr509/hall-plasmas-discharge-solver/downloads`